


Distance adapter (body only)

Distanzadapter-Stutzen

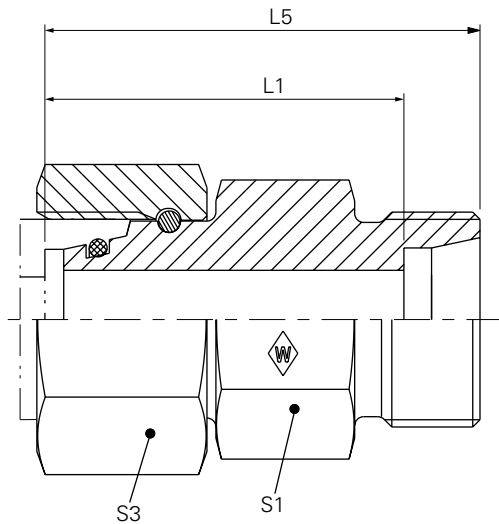

DAS ...

- with taper and O-Ring NBR* (e.g. Perbunan)
- mit Dichtkegel und O-Ring NBR* (z.B. Perbunan)

Series	PN	Tube-OD	Type	Reference	kg/100							*O-ring	
Reihe	bar (psi)	Rohr-AD	Typ	Best.-Nr.	pieces	kg/100 St.	L2	L5	L1	S1	S2	S3	*O-Ring
L	500 (7252)	6	DAS 6 L A4GS	WAL627401	4,6	51	43,0	36	12	14	17	4,5x1,5	
		8	DAS 8 L A4GS	WAL627402	4,9	51	43,0	36	14	17	17	6x1,5	
		10	DAS 10 L A4GS	WAL627403	6,5	51	43,0	36	17	19	19	8,5x1,5	
	400 (5801)	12	DAS 12 L A4GS	WAL627404	8,3	51	43,0	36	19	22	12	10x1,5	
		15	DAS 15 L A4GS	WAL627405	12,2	51	43,0	36	24	27	27	12x2	
		18	DAS 18 L A4GS	WAL627406	16,2	52	43,5	36	27	32	32	15x2	
	250 (3626)	22	DAS 22 L A4GS	WAL627407	21,7	56	47,5	40	32	36	36	20x2	
		28	DAS 28 L A4GS	WAL627408	36,0	57	47,5	40	41	41	46	26x2	
		35	DAS 35 L A4GS	WAL627409	49,7	72	60,5	50	46	50	50	32x2,5	
		42	DAS 42 L A4GS	WAL627410	81,5	83	71,0	60	55	60	60	38x2,5	
S	800 (11603)	6	DAS 6 S A4GS	WAL627411	5,2	51	43,0	36	14	17	17	4,5x1,5	
		8	DAS 8 S A4GS	WAL627412	6,8	51	43,0	36	17	19	19	6x1,5	
		10	DAS 10 S A4GS	WAL627413	8,7	52	43,5	36	19	22	22	8,5x1,5	
	630 (9137)	12	DAS 12 S A4GS	WAL627414	10,8	52	43,5	36	22	24	24	10x1,5	
		14	DAS 14 S A4GS	WAL627415	14,3	58	48,0	40	24	27	27	12X2	
		16	DAS 16 S A4GS	WAL627416	17,2	58	48,5	40	27	30	30	14x2	
	400 (5801)	20	DAS 20 S A4GS	WAL627417	28,7	68	56,5	46	32	36	36	17,3x2,4	
		25	DAS 25 S A4GS	WAL627418	49,1	74	62,0	50	41	46	46	22,3x2,4	
		30	DAS 30 S A4GS	WAL627419	62,9	83	69,5	56	46	50	50	27,3x2,4	
		38	DAS 38 S A4GS	WAL627420	89,5	91	76,0	60	55	60	60	35x2,5	

L2 = approximate length with nuts tightened

S2 = Hex size of captive nut

*FPM (e.g. Viton) on request

L2 = Ungefährmaß bei angezogener Überwurfmutter

S2 = Schlüsselweite der Überwurfmutter


*FPM (z.B. Viton) auf Anfrage



Powering Business Worldwide

Distance adapter

Distanzadapter-Verschraubung

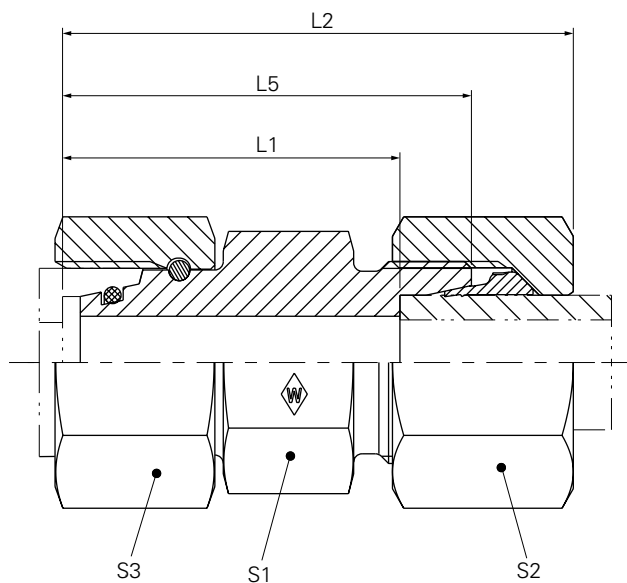

P-DAV ...

- with taper and O-Ring NBR* (e.g. Perbunan)
- mit Dichtkegel und O-Ring NBR* (z.B. Perbunan)

Series Reihe	PN bar (psi)	Tube-OD Rohr-AD	Type Typ	Reference Best.-Nr.	kg/100 pieces kg/100 St.	L2	L5	L1	S1	S2	S3	*O-ring *O-Ring
L	500 (7252)	6	P-DAV 6 L A4GS	WAL627441	5,8	51	43,0	36	12	14	17	4,5x1,5
		8	P-DAV 8 L A4GS	WAL627442	6,6	51	43,0	36	14	17	17	6x1,5
		10	P-DAV 10 L A4GS	WAL627443	8,7	51	43,0	36	17	19	19	8,5x1,5
	400 (5801)	12	P-DAV 12 L A4GS	WAL627444	11,3	51	43,0	36	19	22	12	10x1,5
		15	P-DAV 15 L A4GS	WAL627445	17,1	51	43,0	36	24	27	27	12x2
		18	P-DAV 18 L A4GS	WAL627446	23,2	52	43,5	36	27	32	32	15x2
	250 (3626)	22	P-DAV 22 L A4GS	WAL627447	30,9	56	47,5	40	32	36	36	20x2
		28	P-DAV 28 L A4GS	WAL627448	46,4	57	47,5	40	41	41	46	26x2
		35	P-DAV 35 L A4GS	WAL627449	65,7	72	60,5	50	46	50	50	32x2,5
		42	P-DAV 42 L A4GS	WAL627450	106,5	83	71,0	60	55	60	60	38x2,5
S	800 (11603)	6	P-DAV 6 S A4GS	WAL627451	7,2	51	43,0	36	14	17	17	4,5x1,5
		8	P-DAV 8 S A4GS	WAL627452	9,1	51	43,0	36	17	19	19	6x1,5
		10	P-DAV 10 S A4GS	WAL627453	12,1	52	43,5	36	19	22	22	8,5x1,5
	630 (9137)	12	P-DAV 12 S A4GS	WAL627454	14,8	52	43,5	36	22	24	24	10x1,5
		14	P-DAV 14 S A4GS	WAL627455	19,9	58	48,0	40	24	27	27	12X2
		16	P-DAV 16 S A4GS	WAL627456	24,6	58	48,5	40	27	30	30	14x2
	400 (5801)	20	P-DAV 20 S A4GS	WAL627457	39,8	68	56,5	46	32	36	36	17,3x2,4
		25	P-DAV 25 S A4GS	WAL627458	71,1	74	62,0	50	41	46	46	22,3x2,4
		30	P-DAV 30 S A4GS	WAL627459	86,5	83	69,5	56	46	50	50	27,3x2,4
		38	P-DAV 38 S A4GS	WAL627460	123,3	91	76,0	60	55	60	60	35x2,5

L2 = approximate length with nuts tightened

L2 = Ungefährmaß bei angezogener Überwurfmutter

*FPM (e.g. Viton) on request

*FPM (z.B. Viton) auf Anfrage